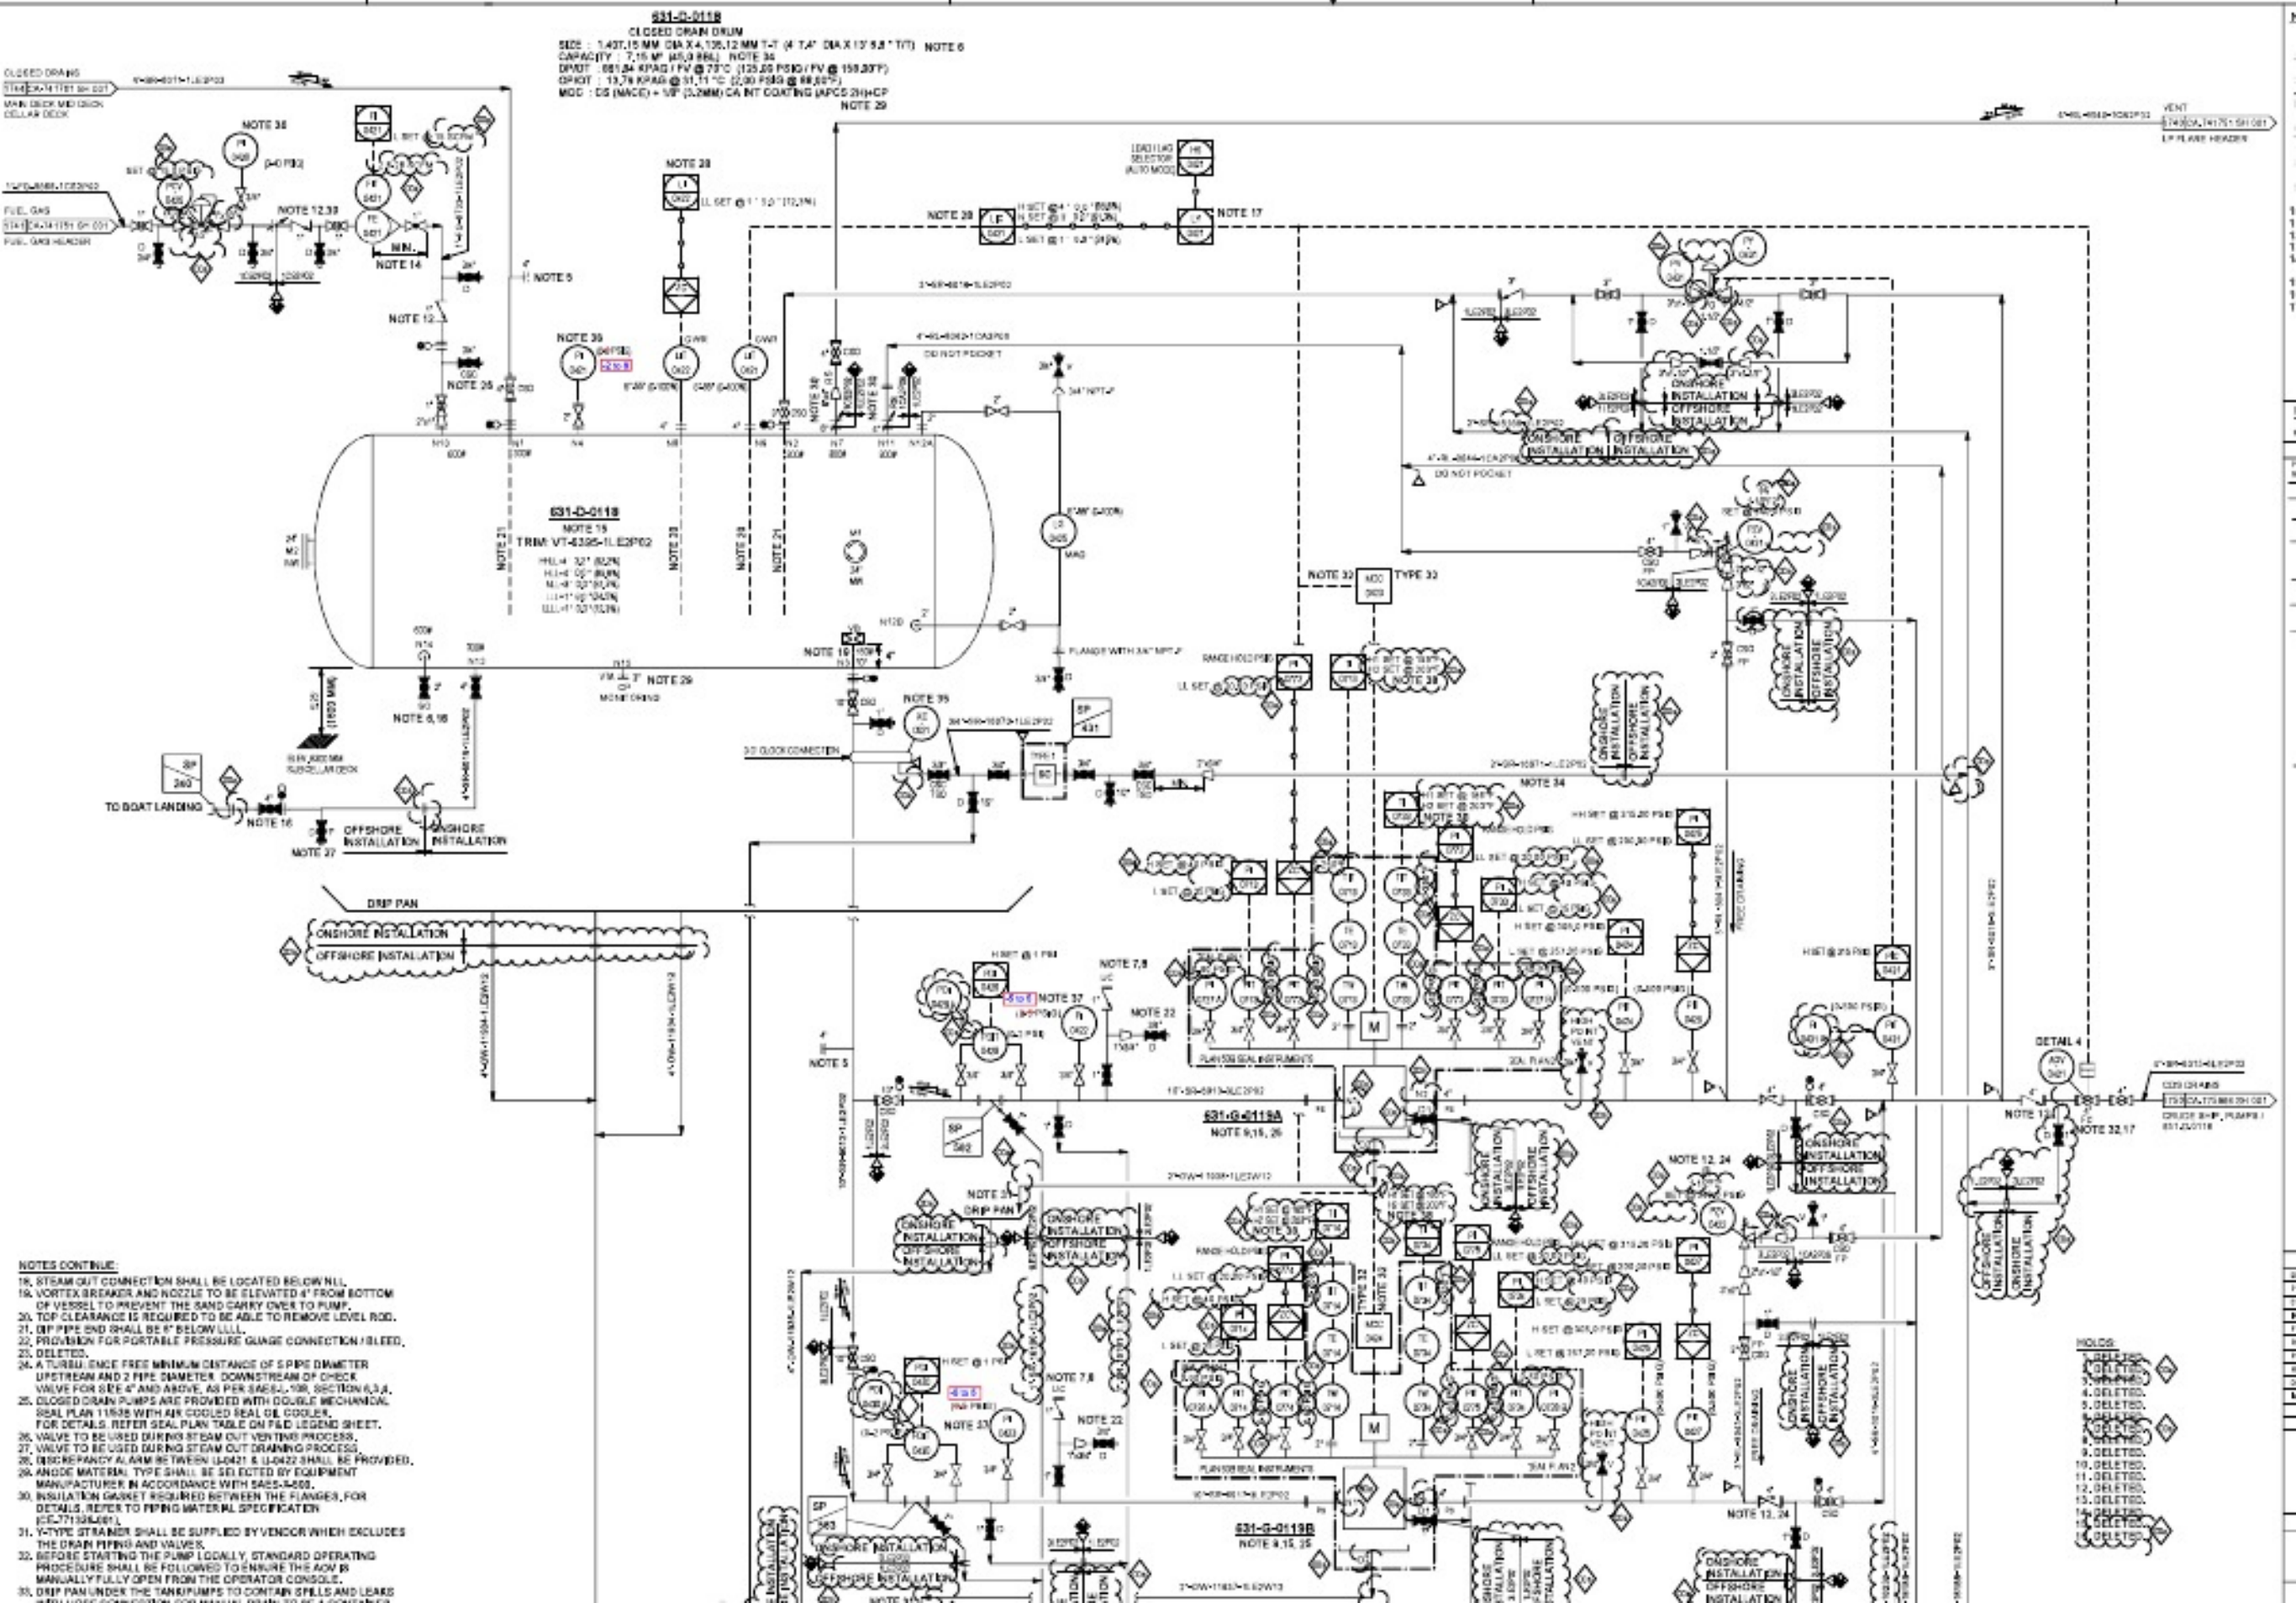

NOTES CONTINUE:

18. STEAM OUT CONNECTION SHALL BE LOCATED BELOW NLL.
19. VORTEX BREAKER AND NOZZLE TO BE ELEVATED 4" FROM BOTTOM OF VESSEL TO PREVENT THE SAND CARRY OVER TO PUMP.
20. TOP CLEARANCE IS REQUIRED TO BE ABLE TO REMOVE LEVEL ROD.
21. DIP PIPE END SHALL BE 6" BELOW LLLL.
22. PROVISION FOR PORTABLE PRESSURE GUAGE CONNECTION / BLEED.
23. DELETED.
24. A TURBULENCE FREE MINIMUM DISTANCE OF 5 PIPE DIAMETER UPSTREAM AND 2 PIPE DIAMETER DOWNSTREAM OF CHECK VALVE FOR SIZE 4" AND ABOVE, AS PER SAES-L-108, SECTION 6.3.4.
25. CLOSED DRAIN PUMPS ARE PROVIDED WITH DOUBLE MECHANICAL SEAL PLAN 11/53B WITH AIR COOLED SEAL OIL COOLER. FOR DETAILS, REFER SEAL PLAN TABLE ON P&ID LEGEND SHEET.
26. VALVE TO BE USED DURING STEAM OUT VENTING PROCESS.
27. VALVE TO BE USED DURING STEAM OUT DRAINING PROCESS.
28. DISCREPANCY ALARM BETWEEN LI-0421 & LI-0422 SHALL BE PROVIDED.
29. ANODE MATERIAL TYPE SHALL BE SELECTED BY EQUIPMENT MANUFACTURER IN ACCORDANCE WITH SAES-X-500.
30. INSULATION GASKET REQUIRED BETWEEN THE FLANGES, FOR DETAILS, REFER TO PIPING MATERIAL SPECIFICATION (CE-771326-001).
31. Y-TYPE STRAINER SHALL BE SUPPLIED BY VENDOR WHICH EXCLUDES THE DRAIN PIPING AND VALVES.
32. BEFORE STARTING THE PUMP LOCALLY, STANDARD OPERATING PROCEDURE SHALL BE FOLLOWED TO ENSURE THE AOV IS MANUALLY FULLY OPEN FROM THE OPERATOR CONSOLE.
33. DRIP PAN UNDER THE TANK/PUMPS TO CONTAIN SPILLS AND LEAKS

HOLDS:

1. DELETED.
2. DELETED.
3. DELETED.
4. DELETED.
5. DELETED.
6. DELETED.
7. DELETED.
8. DELETED.
9. DELETED.
10. DELETED.
11. DELETED.
12. DELETED.
13. DELETED.
14. DELETED.
15. DELETED.
16. DELETED.

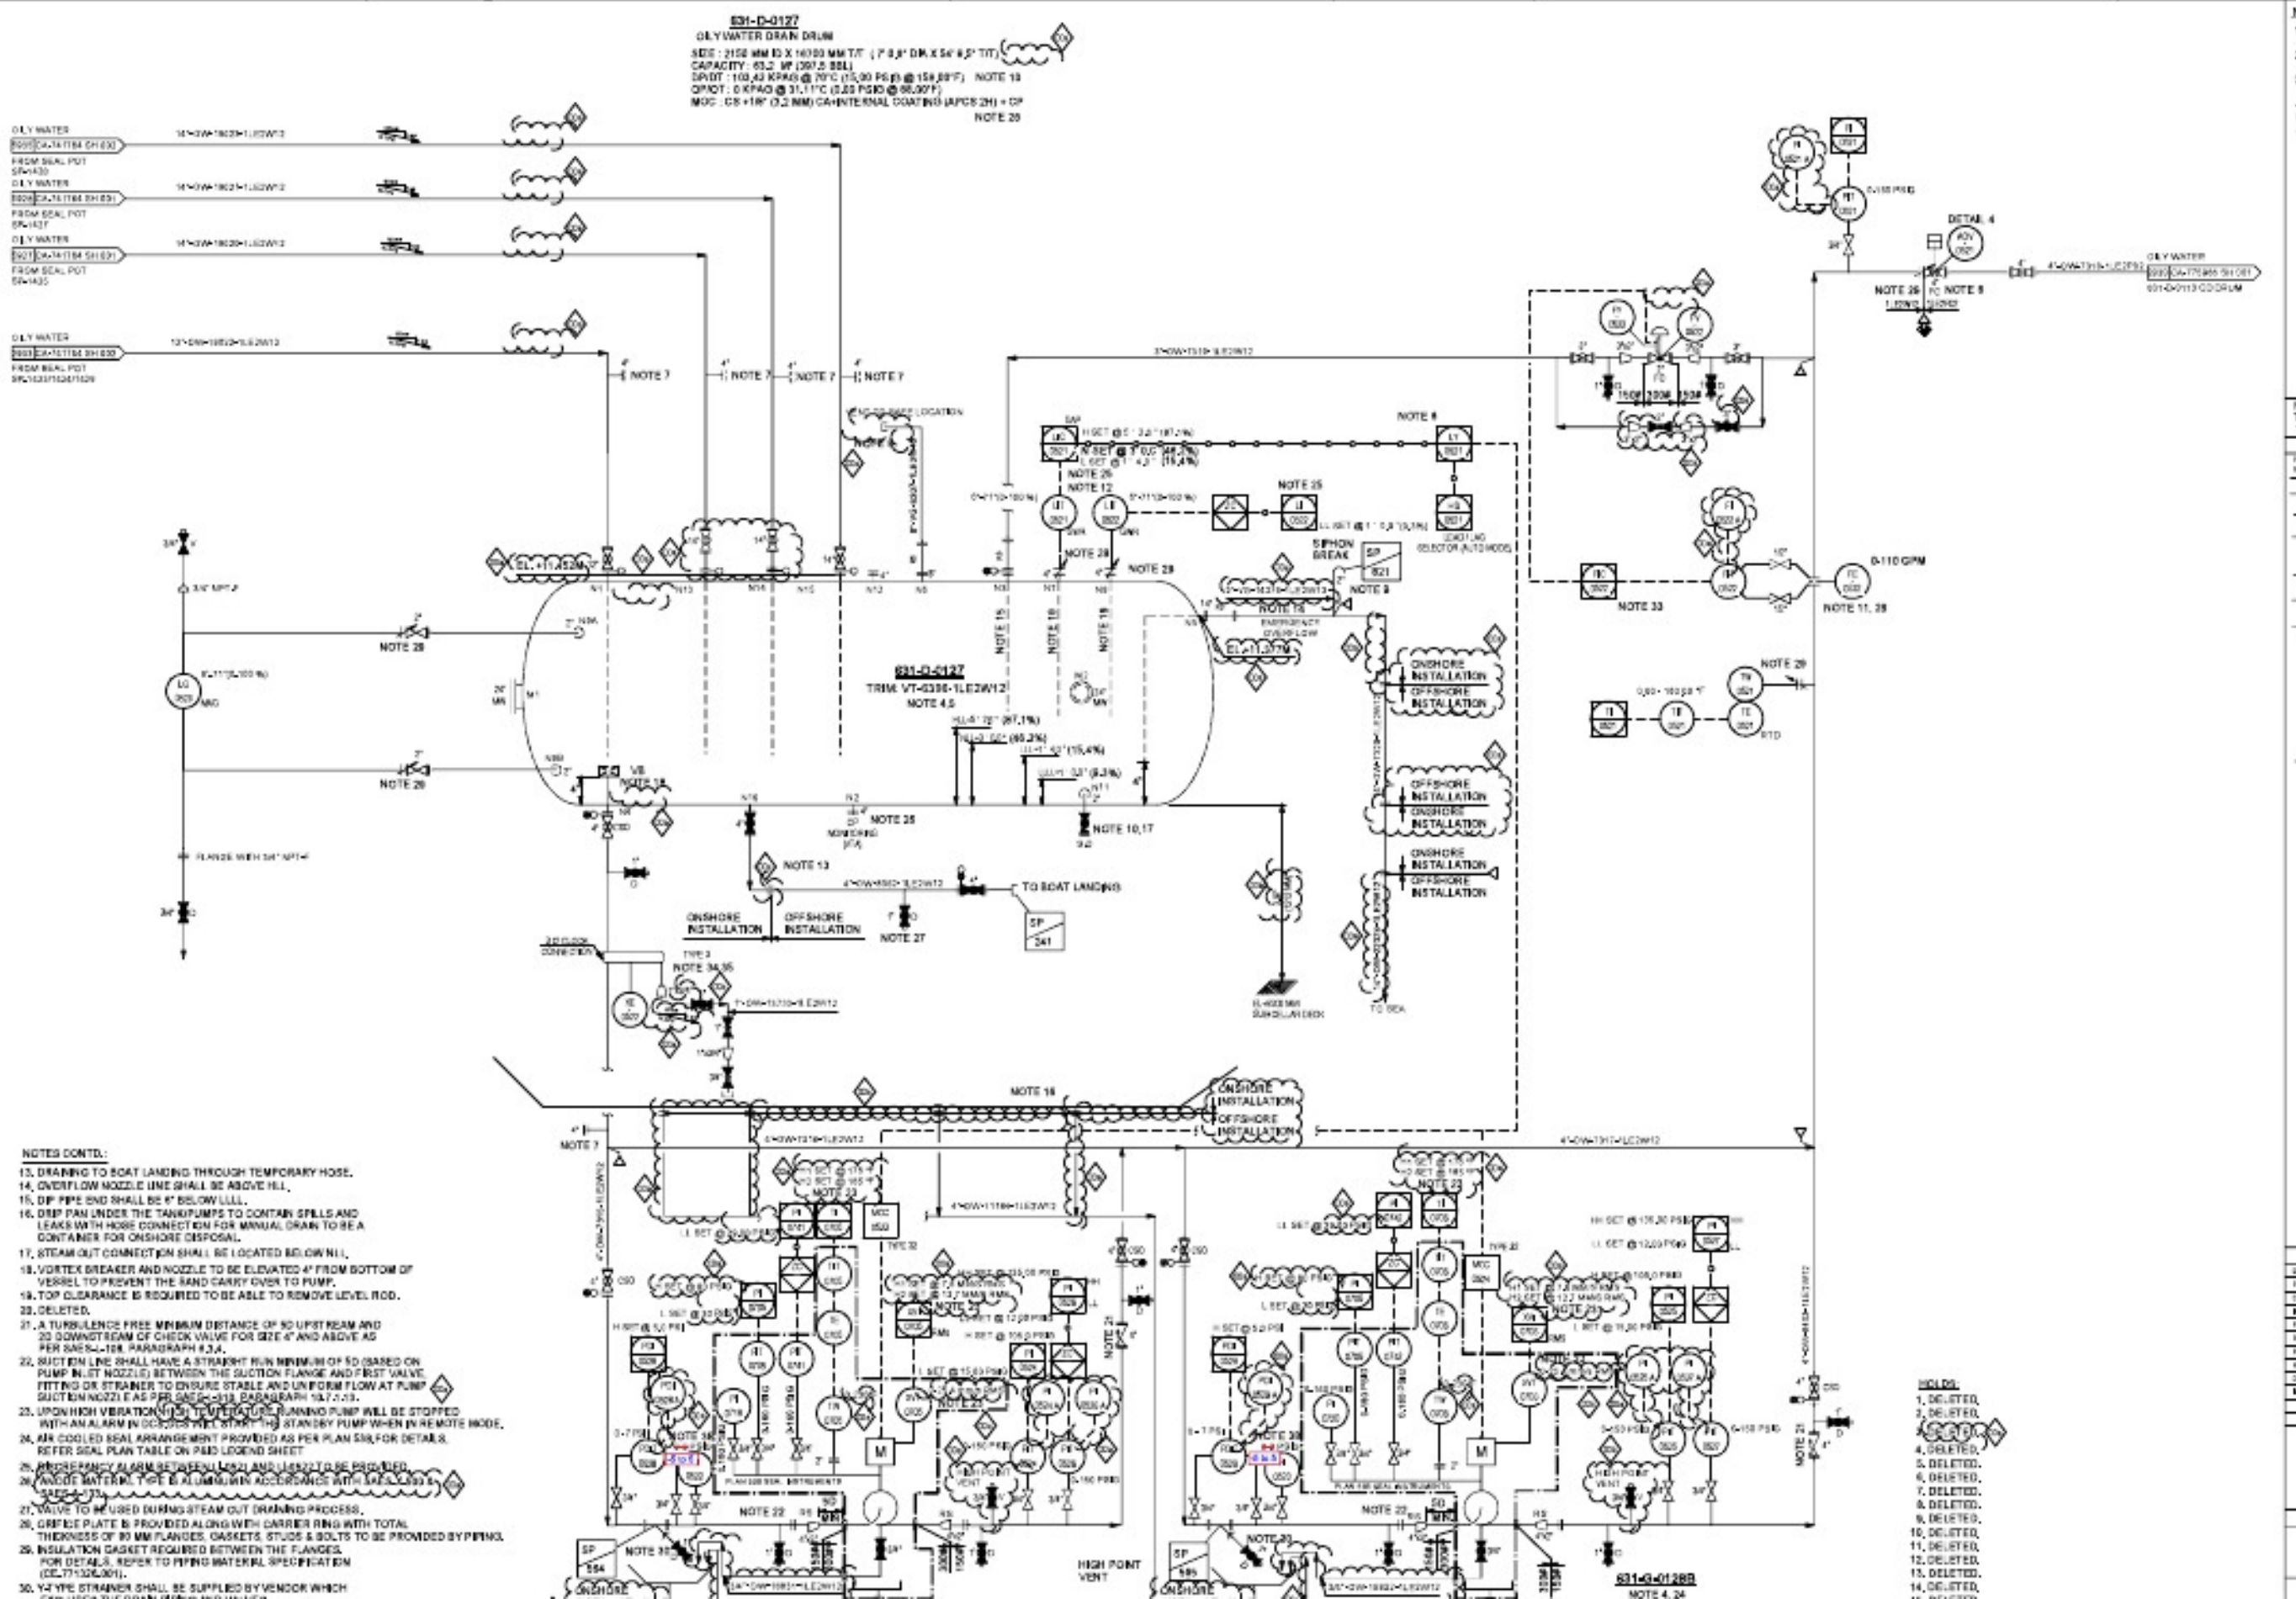

NOTES CONTD.:

13. DRAINING TO BOAT LANDING THROUGH TEMPORARY HOSE.
14. OVERFLOW NOZZLE LINE SHALL BE ABOVE HLL.
15. DIP PIPE END SHALL BE 6" BELOW LLLL.
16. DRIP PAN UNDER THE TANK/PUMPS TO CONTAIN SPILLS AND LEAKS WITH HOSE CONNECTION FOR MANUAL DRAIN TO BE A CONTAINER FOR ONSHORE DISPOSAL.
17. STEAM OUT CONNECTION SHALL BE LOCATED BELOW NLL.
18. VORTEX BREAKER AND NOZZLE TO BE ELEVATED 4" FROM BOTTOM OF VESSEL TO PREVENT THE SAND CARRY OVER TO PUMP.
19. TOP CLEARANCE IS REQUIRED TO BE ABLE TO REMOVE LEVEL ROD.
20. DELETED.
21. A TURBULENCE FREE MINIMUM DISTANCE OF 5D UPSTREAM AND 2D DOWNSTREAM OF CHECK VALVE FOR SIZE 4" AND ABOVE AS PER SAES-L-108, PARAGRAPH 6.3.4.
22. SUCTION LINE SHALL HAVE A STRAIGHT RUN MINIMUM OF 5D (BASED ON PUMP INLET NOZZLE) BETWEEN THE SUCTION FLANGE AND FIRST VALVE, FITTING OR STRAINER TO ENSURE STABLE AND UNIFORM FLOW AT PUMP SUCTION NOZZLE AS PER SAES-L-310, PARAGRAPH 10.7.1.13.
23. UPON HIGH VIBRATION/HIGH TEMPERATURE RUNNING PUMP WILL BE STOPPED WITH AN ALARM IN DCS,DCS WILL START THE STANDBY PUMP WHEN IN REMOTE MODE.
24. AIR COOLED SEAL ARRANGEMENT PROVIDED AS PER PLAN 53B,FOR DETAILS, REFER SEAL PLAN TABLE ON P&ID LEGEND SHEET
25. DISCREPANCY ALARM BETWEEN LI-0521 AND LI-0522 TO BE PROVIDED.
26. ANODE MATERIAL TYPE IS ALUMINUM IN ACCORDANCE WITH SAES-L-833 & SAES-L-173.
27. VALVE TO BE USED DURING STEAM OUT DRAINING PROCESS.
28. ORIFICE PLATE IS PROVIDED ALONG WITH CARRIER RING WITH TOTAL THICKNESS OF 80 MM FLANGES, GASKETS, STUDS & BOLTS TO BE PROVIDED BY PIPING.
29. INSULATION GASKET REQUIRED BETWEEN THE FLANGES. FOR DETAILS, REFER TO PIPING MATERIAL SPECIFICATION (CE-771326.001).
30. Y-TYPE STRAINER SHALL BE SUPPLIED BY VENDOR WHICH

HOLDS:

1. DELETED.
2. DELETED.
3. DELETED.
4. DELETED.
5. DELETED.
6. DELETED.
7. DELETED.
8. DELETED.
9. DELETED.
10. DELETED.
11. DELETED.
12. DELETED.
13. DELETED.
14. DELETED.

HOLDS:

1. DELETED.
2. DELETED.
3. DELETED.
4. DELETED.
5. DELETED.

NOTES CONTINUED.

14. POTABLE WATER PUMP DISCHARGE FAL-3718, FAL-3719 ARE CONFIGURED IN DCS SUCH THAT ALARM IS RAISED ONLY WHEN THE PUMP IS INSTRUCTED TO RUN.
15. ORIFICE PLATE IS PROVIDED ALONG WITH CARRIER RING WITH. TOTAL THICKNESS OF 60 MM FLANGES, GASKETS, STUDS & BOLTS TO BE PROVIDED BY PIPING.
16. INSULATION GASKET REQUIRED BETWEEN THE FLANGES. FOR DETAILS, REFER TO PIPING MATERIAL SPECIFICATION (CE-7710(6-001).
17. SEAL ARRANGEMENT PROVIDED AS PER API SEAL PLAN 11/61. FOR DETAILS, REFER SEAL PLAN TABLE ON P&ID LEGEND SHEET.
18. EMERGENCY POWER SHALL BE PROVIDED TO BOTH POTABLE WATER PUMPS, HOWEVER, ONLY ONE PUMP SHALL BE RUNNING ON EMERGENCY POWER AT A TIME.
19. THIS SPOOL WILL BE INSTALLED IN CLOSED POSITION IN NORMAL OPERATION.
20. VALVE TYPE SHALL BE DUAL PLATE INTERNALLY-SPRING-ASSISTED NON-SLAM CHECK VALVE.
21. PRESSURE GAUGE WITH GAUGE SAVER AND SNUBBER.
22. UPON HIGH VIBRATION, HIGH TEMPERATURE RUNNING PUMP WILL BE STOPPED WITH AN ALARM IN DCS. DCS WILL START THE STANDBY PUMP WHEN IN REMOTE MODE.
23. TEMPORARY STRAINER TO BE REMOVED AFTER COMMISSIONING SPACER (SPOOL PIECE) TO BE INSTALLED AFTER THE REMOVAL OF TEMPORARY STRAINER.

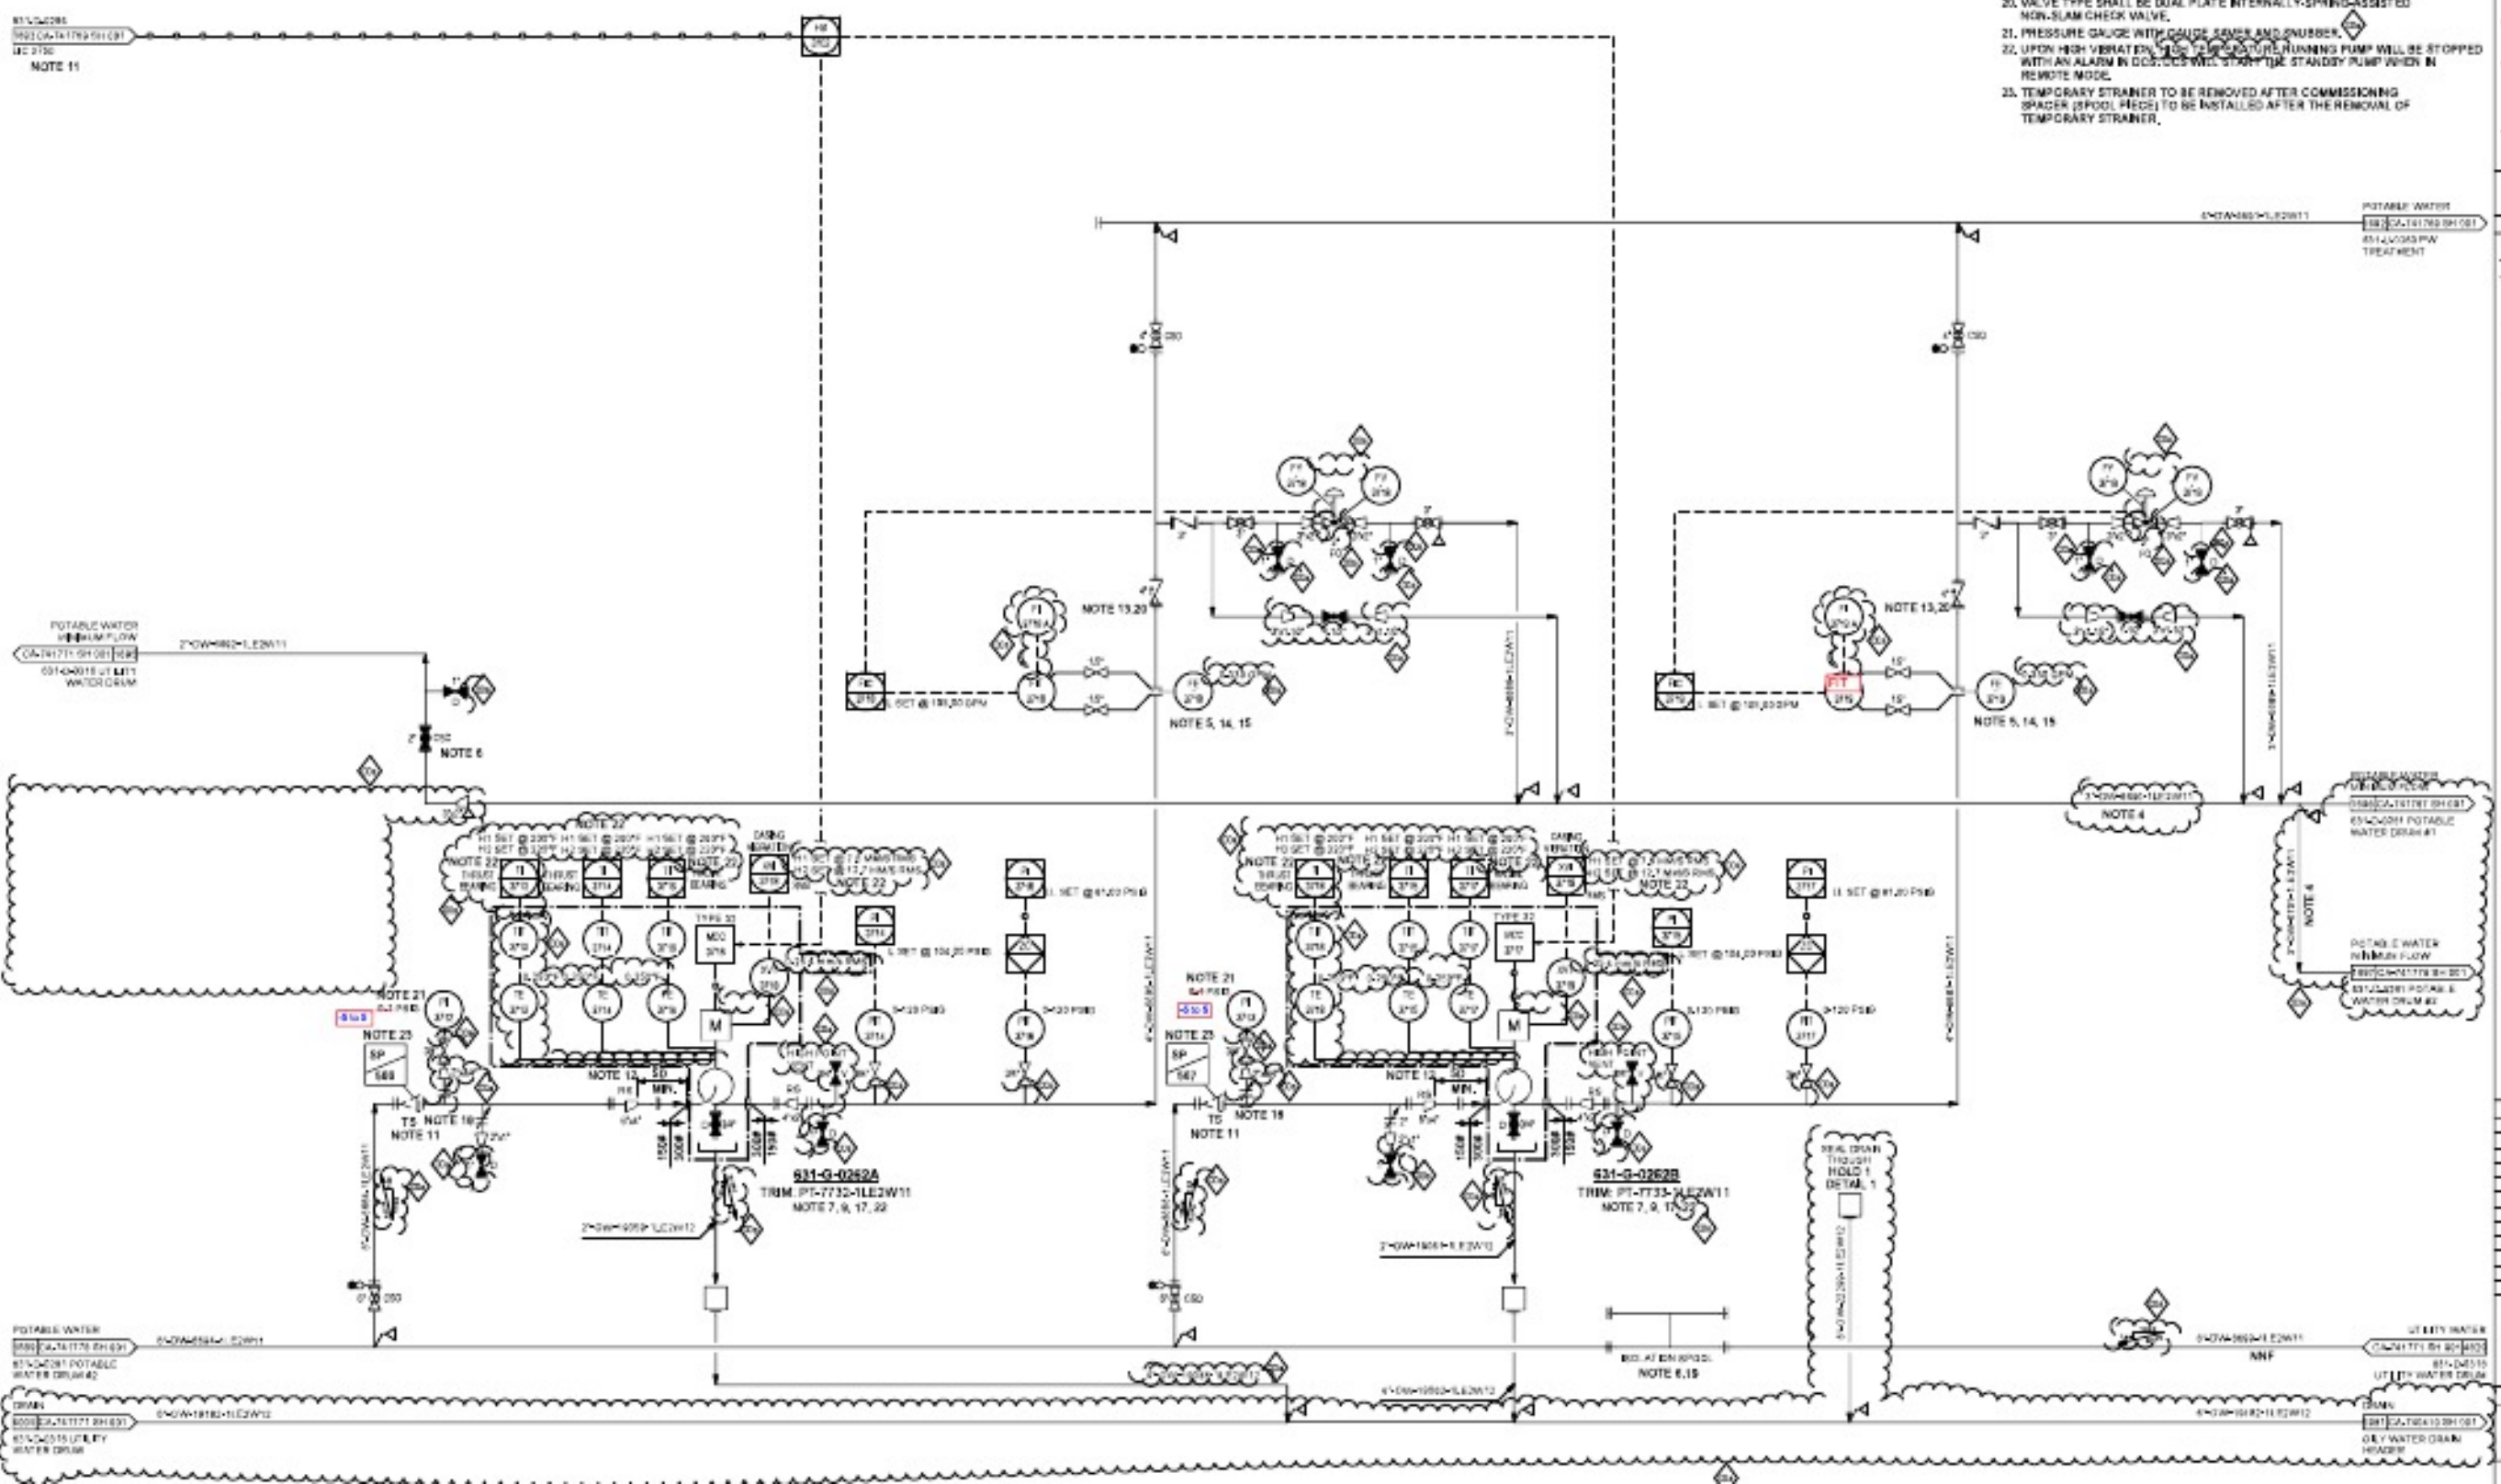

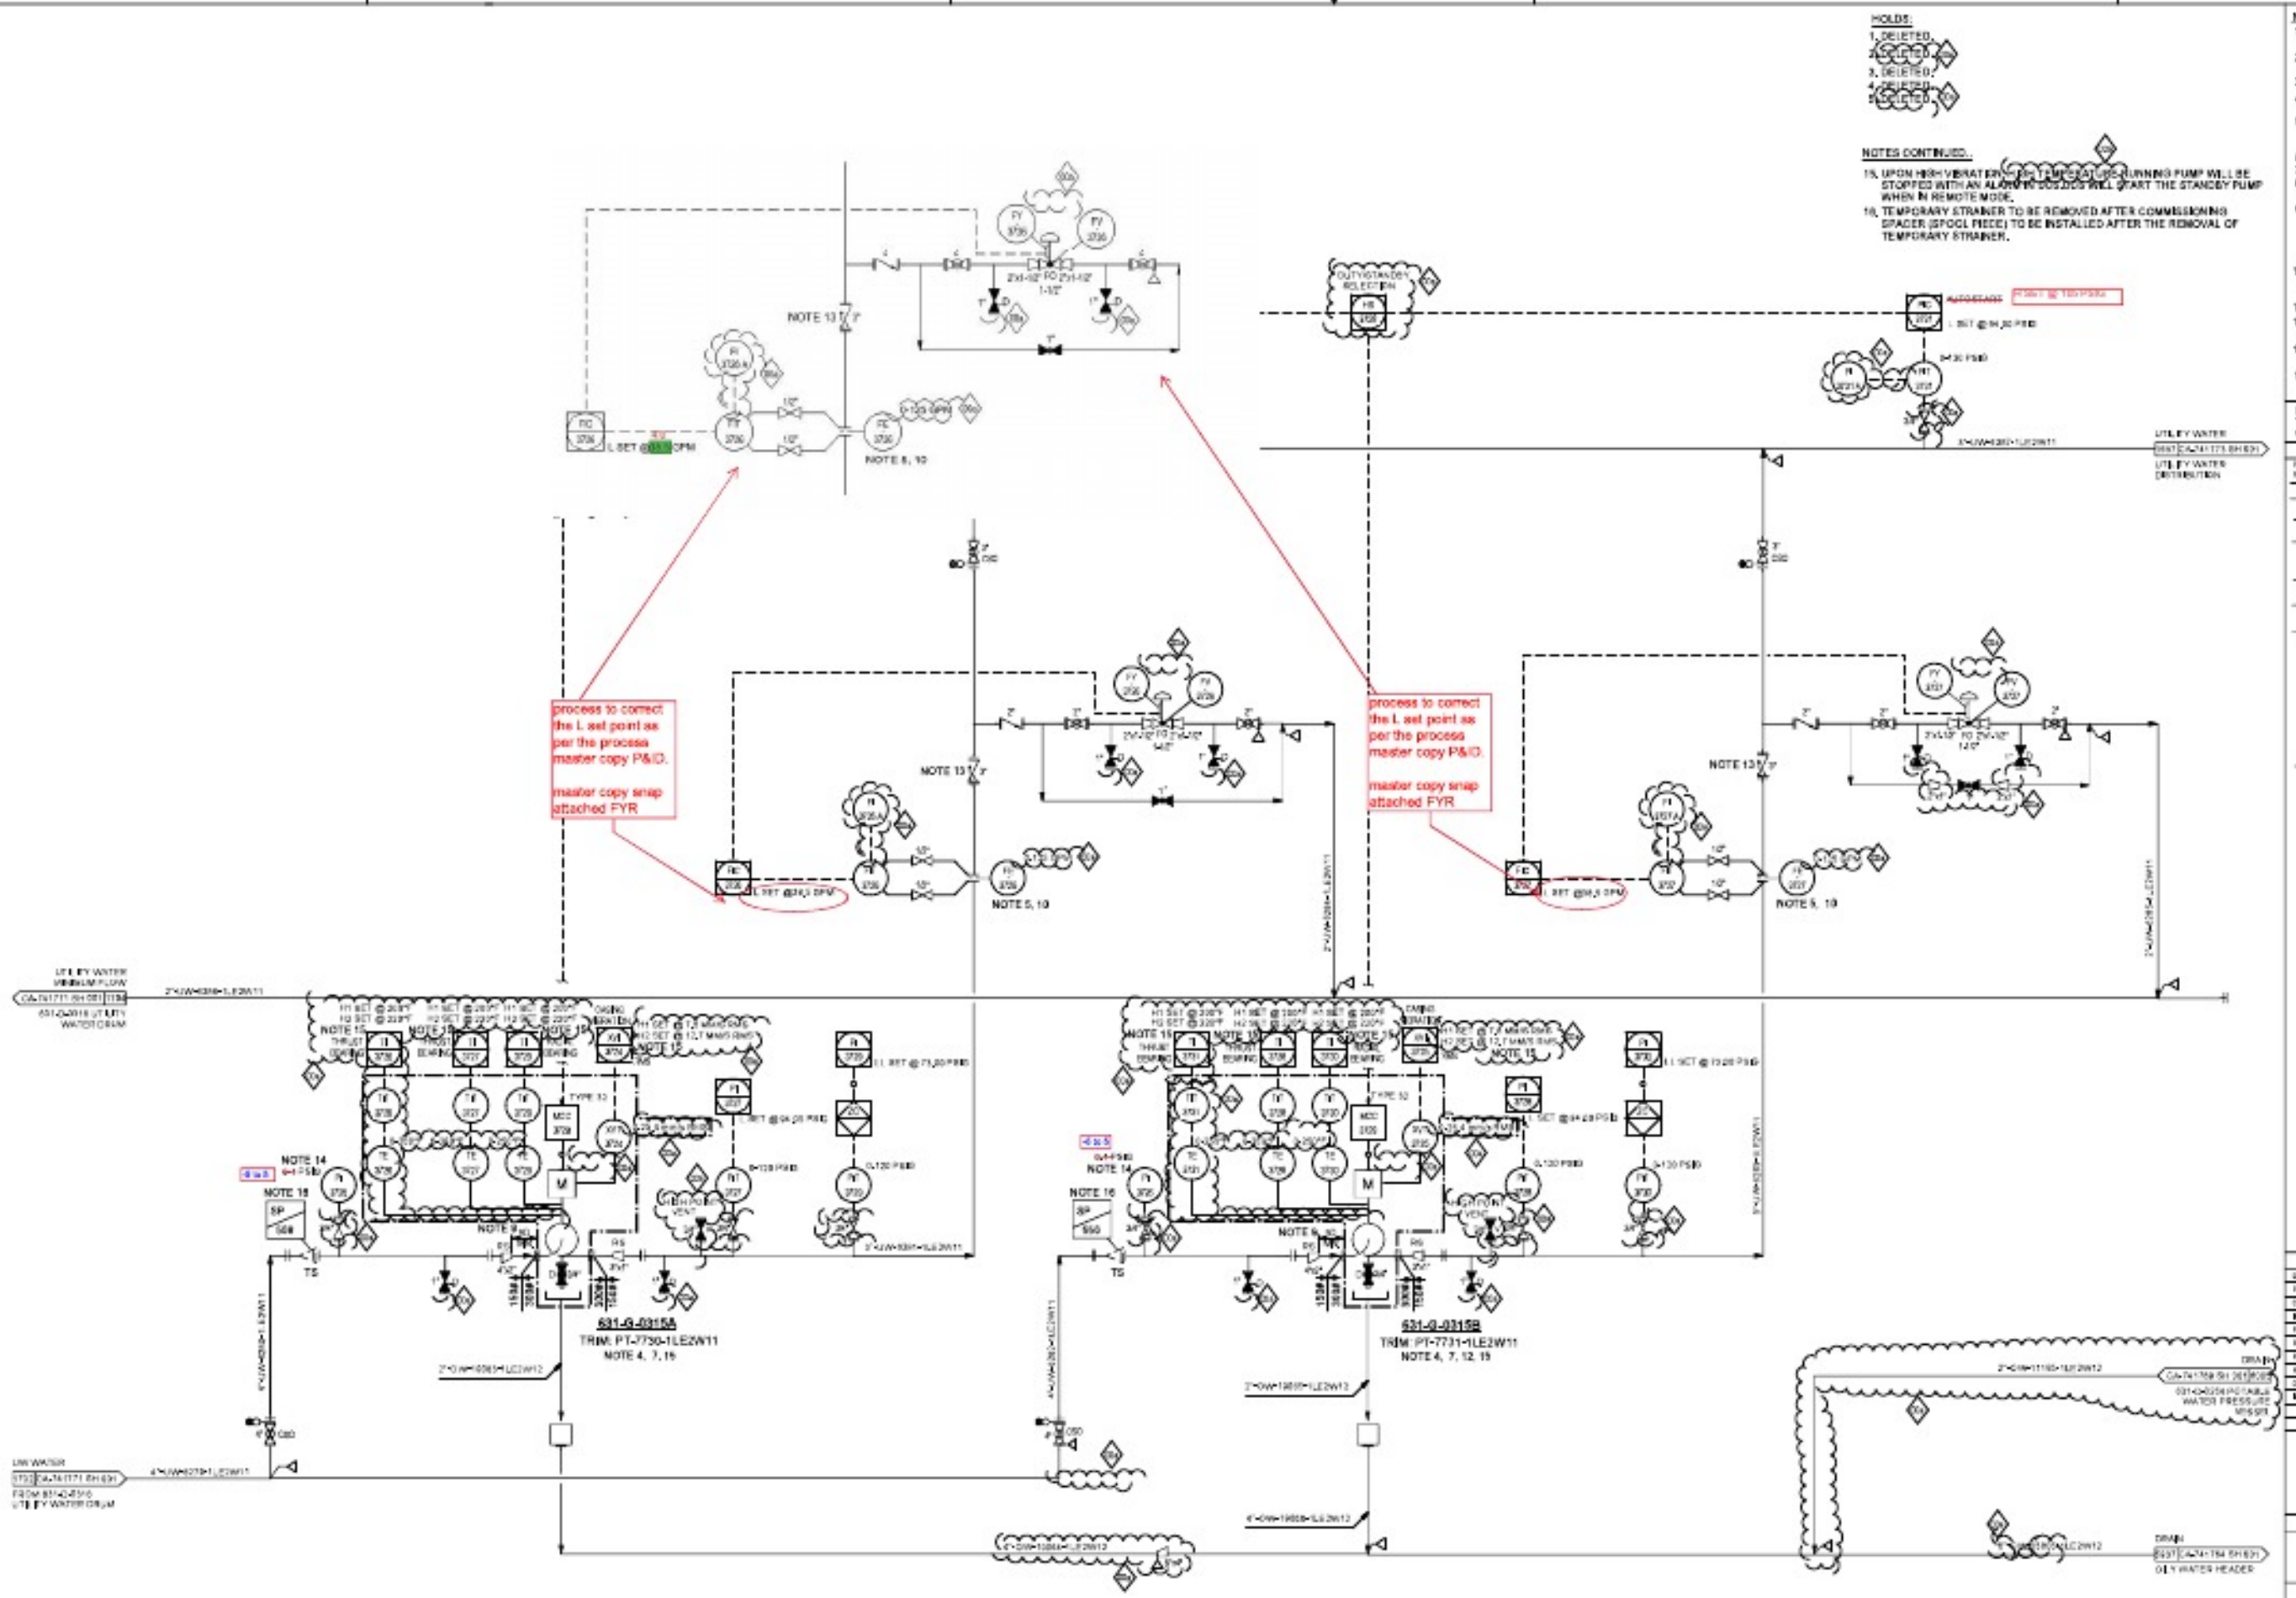

HOLDS:

1. DELETED.
2. DELETED.
3. DELETED.
4. DELETED.
5. DELETED.

NOTES CONTINUED..

15. UPON HIGH VIBRATION / HIGH TEMPERATURE RUNNING PUMP WILL BE STOPPED WITH AN ALARM IN DCS. DCS WILL START THE STANDBY PUMP WHEN IN REMOTE MODE.
16. TEMPORARY STRAINER TO BE REMOVED AFTER COMMISSIONING SPACER (SPOOL PIECE) TO BE INSTALLED AFTER THE REMOVAL OF TEMPORARY STRAINER.

process to correct the L set point as per the process master copy P&ID.

master copy snap attached FYR

process to correct the L set point as per the process master copy P&ID.

master copy snap attached FYR